LINK WALL

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Wall

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

Link Medium Wall (Silver):	LINK MED WAL SLV
Link Medium Wall (White):	LINK MED WAL WHT
Link Medium Wall (Black):	LINK MED WAL BLK
Link Medium Wall (Orange):	LINK MED WAL ORG
Link Medium Wall (Green):	LINK MED WAL GRN
Link Small Wall (Silver):	LINK SML WAL SLV
Link Small Wall (White):	LINK SML WAL WHT
Link Small Wall (Black):	LINK SML WAL BLK
Link Small Wall (Orange):	LINK SML WAL ORG
Link Small Wall (Green):	LINK SML WAL GRN
Link USB (White)	LINK USB

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

180° rotation at base
Full-range height adjustability
180° front to back head tilt
Advanced LED array eliminates multiple shadows
Ships flat-packed
OCC model available upon request

SPECIFICATIONS

Voltage: 120-240V 50-60Hz Power Consumption: 7.5W Color Temperature: 3000K Luminosity: 350 Lumens

Luminaire efficacy: 47 Lumens/Watt Color Rendition Index: 90 CRI

50K hour lifespan Cable length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

PACKAGING WEIG	HI AND D	IIVIEIVOIOIVO	
Link Wall Small:	3.4LBS	33.5" X 7" X 4.5"	
	1.5KGS	85cm X 18cm X 11cm	
Link Wall Medium:	3.6LBS	33" X 6.5" X 4.5"	
	1.6KGS	84cm X 17cm X 11cm	

NOTES

Occupancy sensor model available upon request Custom requests can be considered on volume orders Link USB sold separately






FINISHES



DIMENSIONS

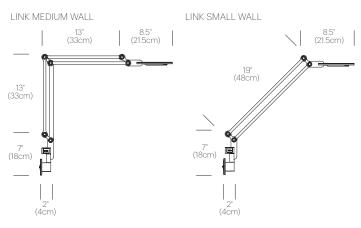

LINK USB PORT ADD-ON

