

# Storage units **Vela**

## Structural technical features


### MODULARITY

#### heights


(excluding feet)

Feet H 5/8"

base support h 3 1/4" - 4 3/4"

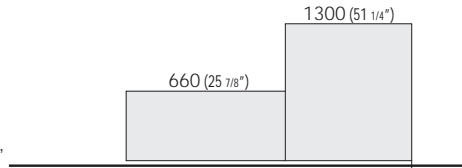

#### depths



#### widths

11220/1230 (48 1/8"/48 1/2")	1220/1230 (48 1/8"/48 1/2")
11520/1530 (59 7/8"/60 1/4")	
11820/1830 (71 3/4"/72 1/8")	
12120/2130 (83 1/2"/83 7/8")	
12420/2430 (95 3/8"/95 3/4")	

### PRODUCT DATA SHEET

STRUCTURE FOR ELEMENTS in wood particle board panels\* thickness 7/8" rivestiti with synthetic melamine also matt lacquered or metal or with lacquered wood veneer. Internal shelves in transparent tempered glass thickness 1/4".

FRONTS in medium density \*wood particle board panels thickness 7/8" with handle built-in the thickness and coated with synthetic melamine matt, glossy lacquered or metal or lacquered wood veneer. For glossy version the internal side of fronts is always in matt finish.

BACK PANELS in medium density \*wood particle board panels thickness 1/4" with synthetic melamine also matt lacquered or metal (possible combinations at page 124).

TURN DRAWER thickness 5/8" and BOTTOM thickness 3/8" in \*wood particle board panels with melamine Juta-effect.

FRAME in medium density \*wood particle board panels thickness 1/2" and in wood particle board panels\* thickness 5/8" coated with synthetic melamine matt, glossy lacquered or metal or painted wood veneer. Black ABS FEET, diam. 1 7/8" and height 5/8" adjustable form the inside.

SOSPENDO BASE SUPPORT consisting of black metal frame with shaped laser-cut steel feet finished with epoxy or liquid painting or in methacrylate with transparent finish.



\*Wood and derivates components according to the following standards: EPA TSCA TITLE VI.

### RUNNERS FOR DRAWERS



**Opening with grip:** High sliding full extraction metal runners with FULL EXTRACTION, end-of-run buffer with dynamic capacity of 30 kg. "Blumotion" soft-closing mechanism integrated in the runner for a silence and soft closing system.. Anti-tilting pin, vertical and inclination adjustment of fronts incorporated in all system runners. Additional stabilizer bar for drawers width 35 1/2".

### BASE/WALL UNITS WITH HINGED DOOR W 23 5/8"-47 1/4"



#### SINGLE LH DOOR UNIT






#### SINGLE RH DOOR UNIT




#### UNIT with 4 DOORS with internal partition



#### DOUBLE DOOR UNIT with internal partition

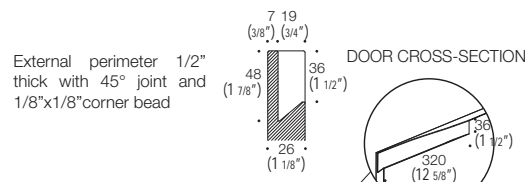

External perimeter 1/2" thick with 45° joint and 1/8"x1/8" corner bead

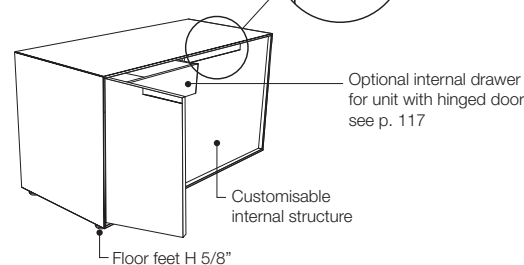

Optional internal drawer for unit with hinged door, see p. 117

Customisable internal structure

Floor feet H 5/8"